


L033030C

Rev. 0 - 10/06/2022

U-can touch steam wand with 3/8" G FEMALE articulated connection

-cap G 3/8" BRASS CW510L (T.E.A. treatment)
 -tube Ø 12 mm AISI 304
 4-hole plastic sprinkler (PEEK BLACK) Ø 1.5 mm
 Components supplied in addition: spring, spring guide and O-ring seal.
 Materials used in compliance with the application and reference standards for contact with foodstuffs.

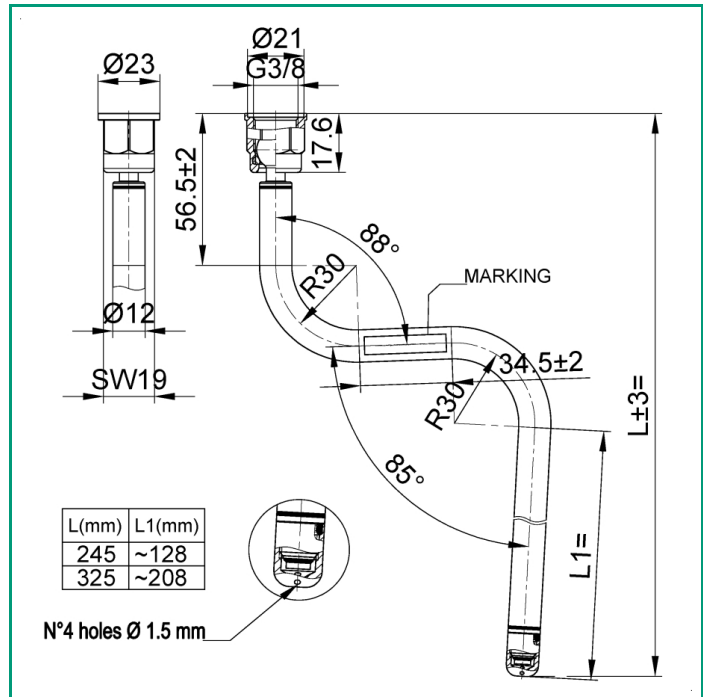

TECHNICAL SPECIFICATION

Spherical articulated joint	OTTONE CW510L AISI 303
Threaded process connection (*) (* Thread STANDARDS (CYL. GAS in accordance with UNI-ISO 228) (CON. GAS in accordance with UNI-ISO 7-1) (NPT in accordance with ANSI B 1.20.1)	3/8" GAS CIL.
wand tube	Ø 12 mm
tube material	AISI 304L AISI 316L
Sheath length L	245 mm, Sheath length L1 128 mm 325 mm, Sheath length L1 208 mm
terminal bulb (aerator)	PEEK
Blow-out cap holes number:	4
Blow-out cap holes diameter:	Ø1,5 mm
Blow-out cap diameter:	Ø12
Fixing system	threaded connection
FCM Prescriptions	Before the use is required to wash the food contact areas

TECHNICAL SPECIFICATION

Contact food type	LATTE ACQUA/VAPORE
Type of contact	short and frequently
Notes for FCM	la LANCIA è idonea al contatto con ACQUA/VAPORE a 130°C e LATTE a 70°C